

ENCLOSURES STEEL, FIBERGLASS



FIBERGLASS with SS* LATCHES 6661-1275 & 6661-1276

- Suited for high temperature or corrosive environments
- Protects from dirt, dust, oil & water
- NEMA/EEMAC Type 4, 4X, 12 construction
- Strong, molded, UV stabilized fiberglass reinforced polyester construction with matching raised cover
- Fiberglass material is easily punched, drilled or sawed
- 304 stainless steel twist latches feature padlock hasp
- Continuous stainless steel hinge
- Gasket- closed-cell neoprene cord encased in a continuous channel
- 304 stainless steel wall mounting feet & screws
- 10-32 threaded inserts installed for optional back panel
- 2 twist-lock latches with a space for a lock
- 3 DIN rails to mount optional equipment inside
- Mounting holes for protection boards
- 3 digital, 4 analog, VREF, SW'D 12, 4 SDI-12, Input Power & a phone line (RJ to Terminal block) supplied through the terminal blocks.
- 3 PG-9 and 2 PG-11 plugs
- Cable strain relief fittings for additional wires
- Single point grounding connector
- UL 508 listed, Type 1, 2, 3, 3R, 4, 4X, 12, 13
- CSA certified LR 89590 for use with industrial control equipment CSA Enc. 1, 2, 3, 4, 4X, 12, 13

6661-1276-1 ADDITIONAL SPECIFICATIONS


- GPS & RF-out connections included
- RF-out configured for panel-mounted Polyphaser Lightning Protection (fits in RF-out & ground connections)

MODIFIED STEEL NEMA4 ENCLOSURE 5100-0100-1

- NEMA Enclosure assembly w/6 water-tight glands
- External mounting feet
- Seams continuously welded
- Rolled lip around door to exclude liquids
- Oil resistant gasket
- Hasp & staple for padlocking
- Grey polyester powder coating inside and out

ORDERING

- 2251-1496** Unmodified Steel Enclosure, 24" x 20"
- 8205-0001-1** Enclosure, NEMA4, Steel w/8200 tray;
20 in. H x 20 in. W x 12 in. D

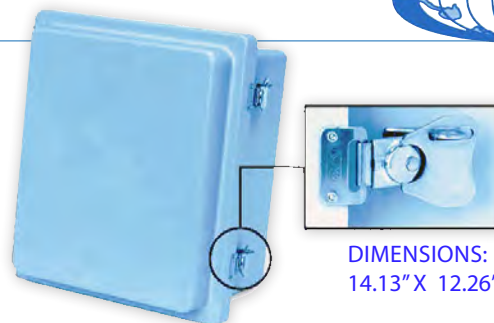

DIMENSIONS:
14.13" X 12.26" X 6.13"

4X FIBERGLASS ENCLOSURE 2251-1556

- Highly effective corrosion-resistant housing for electrical & electronic controls
- Provides outstanding protection against atmospheric & marine corrosion in indoor or outdoor settings
- Molded fiberglass-reinforced material - excellent temperature, chemical & high impact resistance
- Easily punched, drilled, filed, or sawed
- Seamless foam-in-place gasket-watertight & dust-tight seal
- May be rotated 180 degrees for left and right hinging
- Molded-in drip shields are standard with each enclosure
- Impact-resistant polycarbonate window is permanently bonded in place
- Fiberglass mounting brackets and stainless steel attachment screws
- Door opens 180 degrees
- Replaceable breakaway hinges
- Patented Type 316 stainless steel quarter-turn latch. Optional keylocking or padlocking handle available
- Molded-in DIN bosses
- Molded bosses on door provide additional mounting
- Integral mounting rails provide infinite panel adjustment front to back
- Optional data pocket is high-impact thermoplastic

EXTERNAL DIMENSIONS	20.18 "x 16.24"
INTERNAL DIMENSIONS	19.51" x 15.57" x 8.64"
FINISH & COLOR	Light gray acrylic enamel for enhanced UV protection.
INDUSTRY STANDARDS	UL 508A, 508, File No. E61997:Type 3, Type 3R, Type 4, Type 4X, Type 12, & Type 13
	NEMA/EEMAC Type 3, Type 3R, Type 4, Type 4X, Type 12, & Type 13
	Enclosure flammability rating per UL 508
	CSA File No. LR42186:Type 3, Type 3R, Type 4, Type 4X, Type 12, and Type 13
	IEC 60529, IP66
	Meets Type 3RX requirements

